


## FORESTRY MULCHERS FOR EXCAVATORS

# PMM/HY

Mulcher with hammer/flail rotor for excavators.

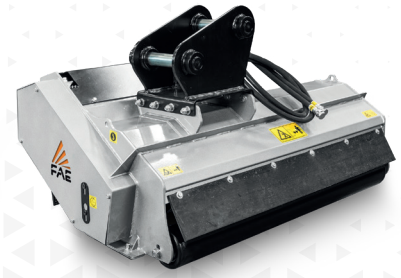

10-32 gal/min



Ø 2 in max



3.5-5.5 t

### STANDARD EQUIPMENT

16cc gear motor with integrated anticavitation valve (10-19 gpm)	Hydraulic hoses
Flow control system valve (only for 16 cc and 27 cc motors)	Self levelling protection flaps
Enclosed / anti dust machine body	Supporting service leg
Motor enclosed in the frame	Welded counterblades
Belt transmission	Rear roller

### OPTIONS

27cc gear motor with integrated anticavitation valve (17-26 gpm)	Customized attachment bracket with pins
17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve (11-32 gpm) (3600 psi)	Attachment plate with self levelling device
Customized setting hydraulic motor	Possibility to have the rotor equipped with PML hammers or Y-flails
Option 17/34 cc motor Case drain required	

MODEL	PMM/HY 100	PMM/HY 125	PMM/HY 150
<b>Flow rate</b> (gal/min)	10-31.7	10-31.7	10-31.7
<b>Pressure</b> (PSI)	2200-3050	2200-3050	2200-3050
<b>Excavator weight</b> (t)	3.5-5.5	4.0-5.5	4.5-5.5
<b>Working width</b> (in)	40	49	59
<b>Weight</b> (lbs)	551	639	728
<b>Rotor diameter</b> (in)	14.2	14.2	14.2
<b>Max shredding diameter</b> (in)	2	2	2
<b>No. hammers</b> type PML	16	20	24
<b>No. flails</b> type Y/2	16	20	24

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



**Hammer PML**  
(standard)



**Flails Y/2**  
(option)