


FORESTRY MULCHERS FOR EXCAVATORS

PML/HY

Mulcher with hammer/flail rotor for excavators.

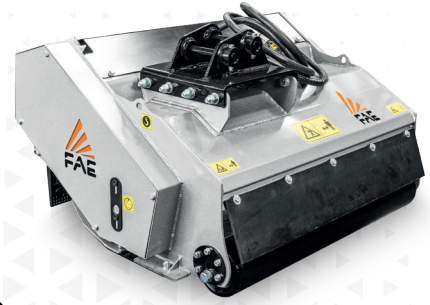

5-16 gal/min



Ø 0.8 in max



1.5-3.5 t

STANDARD EQUIPMENT

8cc gear motor with integrated anticavitation valve (5-11 gpm)	Self levelling protection flaps
Enclosed / anti dust machine body	Supporting service leg
Motor enclosed in the frame	Welded counterblades
Belt transmission	Rear roller
Hydraulic hoses	

OPTIONS

16cc gear motor with integrated anticavitation valve (10-16 gpm)	Attachment plate with self levelling device
Flow control system valve (only for PML/HY-70 and PML/HY-90)	Possibility to have the rotor equipped with PML hammers or Y-flails
Customized attachment bracket with pins	

MODEL	PML/HY 50	PML/HY 70	PML/HY 90
Flow rate (gal/min)	5-15.9	5-15.9	5-15.9
Pressure (PSI)	2200-3050	2200-3050	2200-3050
Excavator weight (t)	1.5-3.5	2.0-3.5	2.5-3.5
Working width (in)	20	28	35
Weight (lbs)	397	430	463
Rotor diameter (in)	14.2	14.2	14.2
Max shredding diameter (in)	1	1	1
No. hammers type PML	8	10	14
No. flails type Y/2	8	10	14

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



Hammer PML
(standard)



Flails Y/2
(option)