


FORESTRY MULCHERS FOR EXCAVATORS

PML/EX

Mulcher with hammer/flail rotor for excavators.

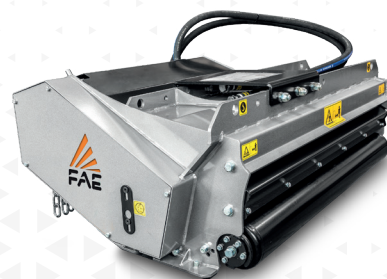

17-34 gal/min



Ø 2 in max



5.5-7.5 t

STANDARD EQUIPMENT

27 cc gear motor with integrated anticavitation valve (17-26 gpm)	Rear hood with mechanical adjustment
Flow control system valve (only for 27 cc and 38 cc motors)	Protection chains
Enclosed / anti dust machine body	Supporting service leg
Motor enclosed in the frame	Welded counterblades
Belt transmission	Rear roller
Hydraulic hoses	

OPTIONS

38cc gear motor with integrated anticavitation valve (24-34 gpm)	Customized attachment bracket with pins
17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve (11-32 gpm) (3600 psi)	Attachment plate with self levelling device
Customized setting hydraulic motor	Possibility to have the rotor equipped with PML hammers or Y-flails
Option 17/34 cc motor Case drain required	

MODEL	PML/EX 100	PML/EX 125	PML/EX 150
Flow rate (gal/min)	17-34	17-34	17-34
Pressure (PSI)	2600-3050	2600-3050	2600-3050
Excavator weight (t)	5.5-7.5	6.0-7.5	6.5-7.5
Working width (in)	40	49	59
Weight (lbs)	705	794	882
Rotor diameter (in)	14.2	14.2	14.2
Max shredding diameter (in)	2	2	2
No. hammers type PML	16	20	24
No. flails type Y/2	16	20	24

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



Hammer PML
(standard)



Flails Y/2
(option)