


FORESTRY MULCHERS FOR EXCAVATORS

BL1/EX - BL1/EX/VT

Forestry mulcher with bite limiter technology.

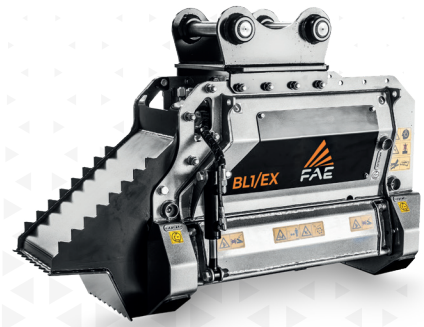

13-37 gal/min



Ø 5 in max



4-7.5 t

STANDARD EQUIPMENT

17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve (13-34 gpm) (BL1/EX)	Motor enclosed in the frame
55/38cc variable torque hydraulic piston motor (17-37 gpm) (BL1/EX/VT)	Belt transmission
Flow control system valve	Bulkhead for hydraulic connections
Safety and anticavitation valve	Rear hood with mechanical adjustment
Enclosed / anti dust machine body	Rotor Bite Limiter

OPTIONS

Customized setting hydraulic motor	Dedicated front hood (deflector)
Diverter valve (plug in and play)	Fixed thumb bracket
Hydraulic rear hood	Customized attachment bracket with pins
Hydraulic front hood for excavator AUX line	Multiple tooth options
Not supplied with hoses	Case drain required

MODEL	BL1/EX - 75	BL1/EX/VT - 75
Flow rate (gal/min)	13-34	17-37
Pressure (PSI)	2600-5080	2600-5080
Excavator weight (t)	4-7.5	4-7.5
Working width (in)	31	31
Weight (lbs)	783	783
Rotor diameter (in)	11.8	11.8
Max shredding diameter (in)	5	5
No. blades type MINI BL	14	14

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.



Blade MINI BL
(standard)



MINI C/3
(option)