

## FORESTRY MULCHERS FOR SKID STEERS

# BL4/SSL

Forestry mulcher for skid steers up to 135 hp.

The BL4/SSL forestry mulcher, designed for Skid steers from 90 to 135 hp and is able to shred material up to 12" in diameter. Thanks to the Bite Limiter technology this head is ideal to have high productivity in vegetation management and provide high and efficient shredding in wooded and forestry areas. The head is designed

to offer high productivity, durability and ease of maintenance for the operator. The BL4/SSL is available in VT version or with Sonic, a FAE exclusive technology that optimizes that performance and can be easily calibrated using the dedicated FAE App for smartphone.




Sonic System



90-135 hp



Ø 12 in max

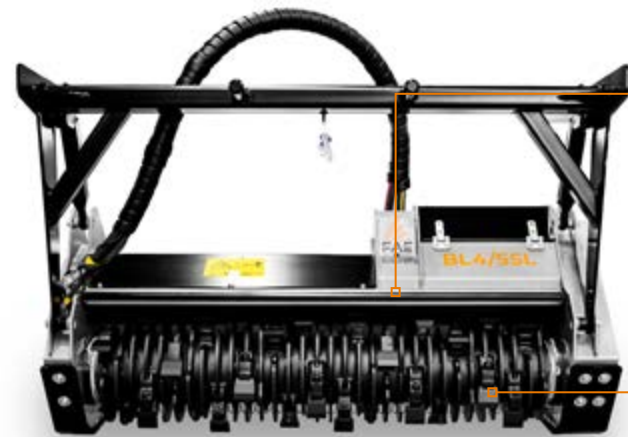

**Interchangeable inner anti-wear plate**  
high reliability and easy replacement

**Low profile frame**  
designed for highest working visibility

**Rotor with Bite Limiter technology**  
maximum productivity using the least amount of power thanks to special wear-resistant steel limiters and blades type BL MAX



**Sonic technology**  
new automatic intelligent system that manages the hydraulic transmission that provides the maximum shredding capacity in all conditions




**VT Motor (Variable Torque)**  
with automatic torque boost

**Hydraulic Quick Couplers**  
Flat face quick couplers to allow a Plug & Play coupling with the most popular skid steers



## MAIN OPTIONS



**Customized VT motor setting**  
Customized motor setting to obtain the maximum performance out of any hydraulic system



**Wiring adaptors**  
Wiring adaptors interface to allows a Plug & Play coupling with the most popular skid steers



**Roof Mounted cooler kit**  
High performance hydraulic oil cooling system to assemble on the skid steer roof

## STANDARD EQUIPMENT

107 cc VT hydraulic piston motor variable displacement (BL4/SSL/VT)	Bite Limiter rotor
107 cc Sonic hydraulic piston motor electronic control (BL4/SSL/SONIC)	Interchangeable flat steel counter blades
Anti-shock block valve with relief and anti-cavitation valves	Sonic System (BL4/SSL/SONIC)
Poly Chain® belt transmission	Hydraulic hoses for connections
Enclosed / anti-dust machine body	Mechanical adjustable guard frame
Motor enclosed in the frame	Interchangeable protection chains
Interchangeable inner anti-wear plate in Hardox®	Interchangeable and adjustable support skids
Interchangeable forged steel rotor shafts	

## OPTIONS

Customized setting hydraulic motor (BL4/SSL/VT)	Roof mounted cooler kit
Adaptor wiring (BL4/SSL/SONIC)	Rotor type I
Case drain required	

MODEL	BL4/SSL/VT-150	BL4/SSL/SONIC-150	BL4/SSL/VT-175	BL4/SSL/SONIC-175
<b>Power</b> (hp)	90-135	90-135	90-135	90-135
<b>Flow rate</b> (gal/min)	32-45	32-45	32-45	32-45
<b>Pressure</b> (PSI)	3500-5080	3500-5080	3500-5080	3500-5080
<b>Working width</b> (in)	62	62	72	72
<b>Total width</b> (in)	75	75	84	84
<b>Weight</b> (lbs)	2822	2822	3020	3020
<b>Rotor diameter</b> (in)	18.3	18.3	18.3	18.3
<b>Max shredding diameter</b> (in)	12	12	12	12
<b>No. blade</b> type BL/MAX	26	26	32	32

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

\*Variable displacement hydraulic motor.

## ROTOR TYPE BL



**BLADE BL/MAX**  
(standard)



**TOOTH C/3/MAX**  
(option)