



from 120 to 160 HP



Ø6 in max



D6 in

STONE CRUSHER - FORESTRY TILLERS - FORESTRY MULCHER WITH FIXED TOOTH ROTOR.

This unique machine combines the efficiency and functionality of a forestry mulcher with that of a stone crusher. The SFL can mulch and crush up to 6" diameter material and reach a depth of 6". The use of our 2-speed gearbox means you can mulch at 1000 rpms and crush stones at 540 rpm, giving you better processed material. Available in multiple working widths, the SFL is the ultimate solution for a wide variety of applications.

STANDARD EQUIPMENT


- PTO shaft with cam clutch
- Gearbox with freewheel
- Transmission with belts in Poly-Chain® Carbon
- Hydraulic hood
- Welded steel counter-blades
- Adjustable Hardox® counter-blade
- Inner anti wear clad plates FCP
- Enclosed machine body
- Inside lateral protection
- Dual row protection chains

OPTIONS

- Hydraulic top link
- Mechanical push frame
- Hydraulic push frame
- Dozing blade
- Grader blade (not compatible with roller)
- Hydraulic controlled roller (not compatible with dozing blade)



FEATURES

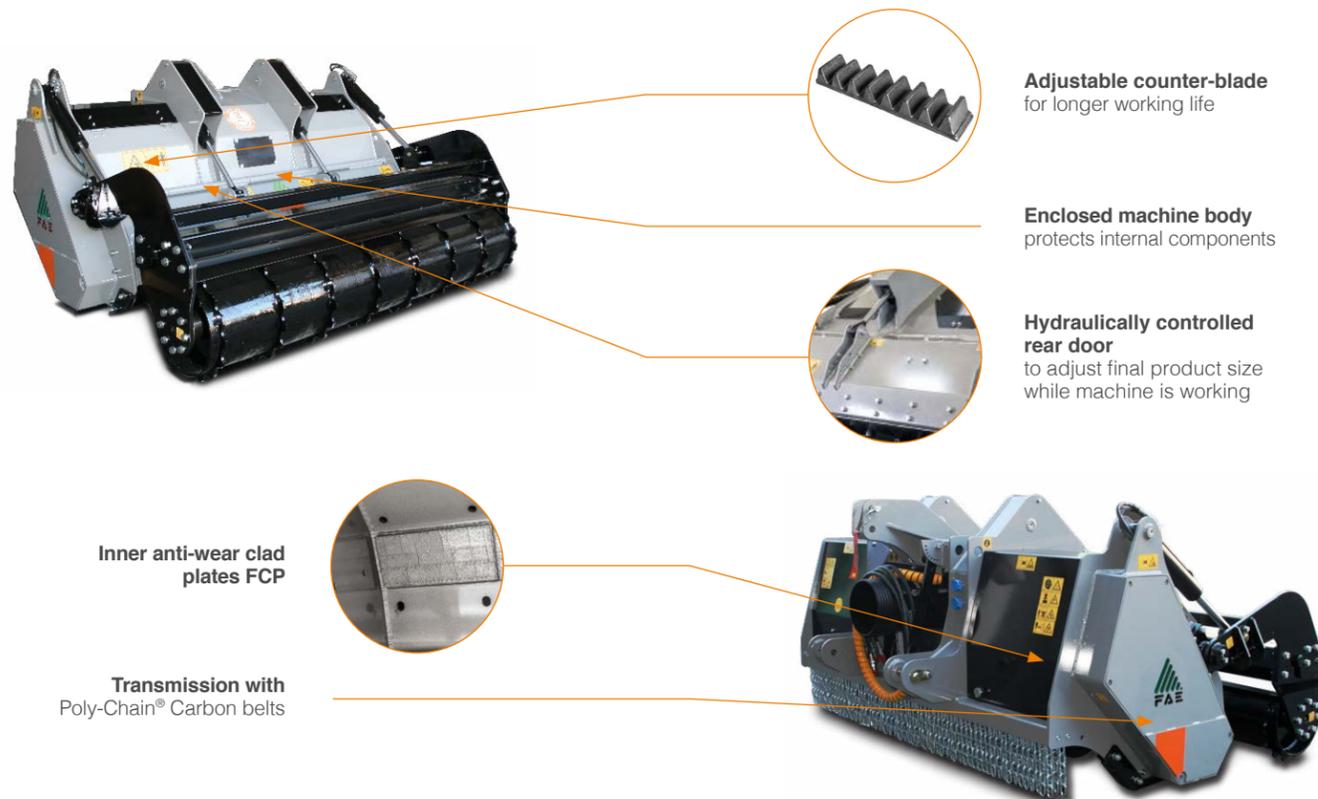

MAIN OPTIONS



1 Grader blade for compaction



2 Hydraulic controlled roller helps with minimal compaction and working uneven terrain

MODEL	Engine (HP)		PTO (rpm)	Working width (in)	Total width (in)	Weight (lbs)	Max shredding diameter (in)	Max working depth (in)	No. teeth type STCL/3 + C/3/SS
	min	max							
SFL 150	120	160	540-1000*	63	75	3200	6	6	30+4
SFL 175	120	160	540-1000*	72	85	3530	6	6	34+4
SFL 200	120	160	540-1000*	81	94	3860	6	6	40+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.

*540 rpm as stone crusher - 1000 rpm as forestry mulcher